

FIG. 1

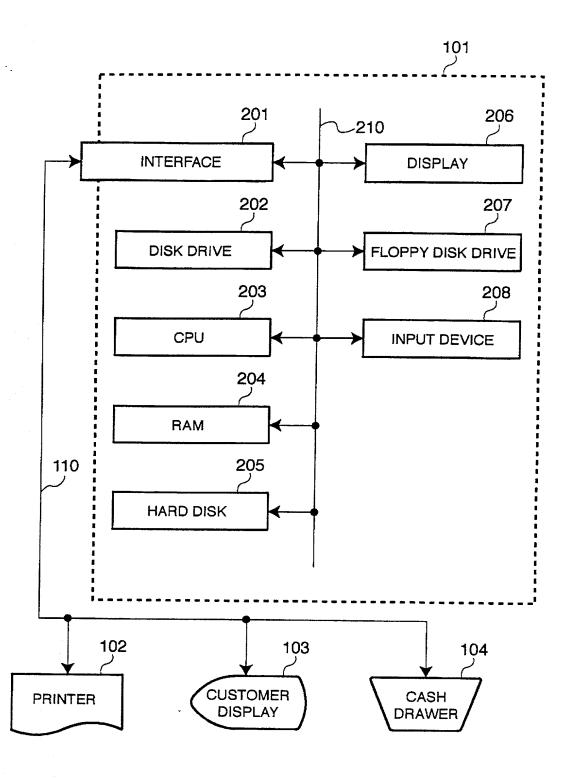


FIG. 2

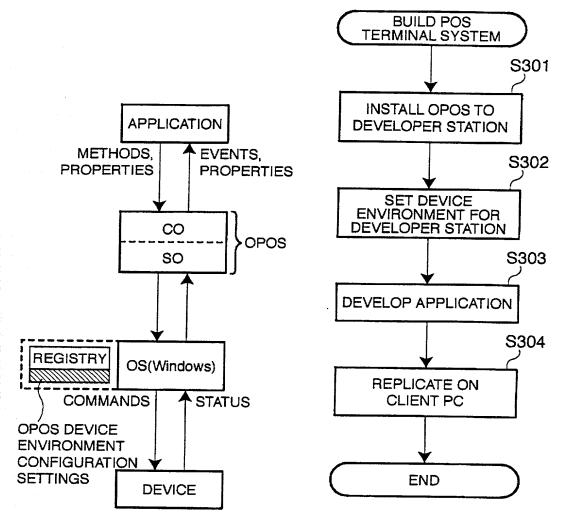


FIG. 3A

FIG. 3B

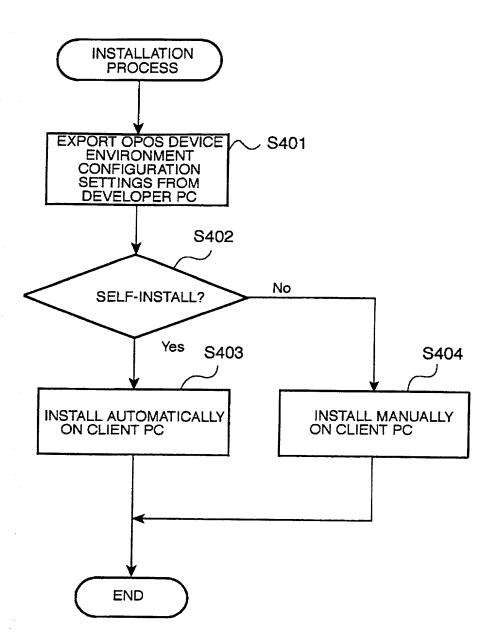


FIG. 4

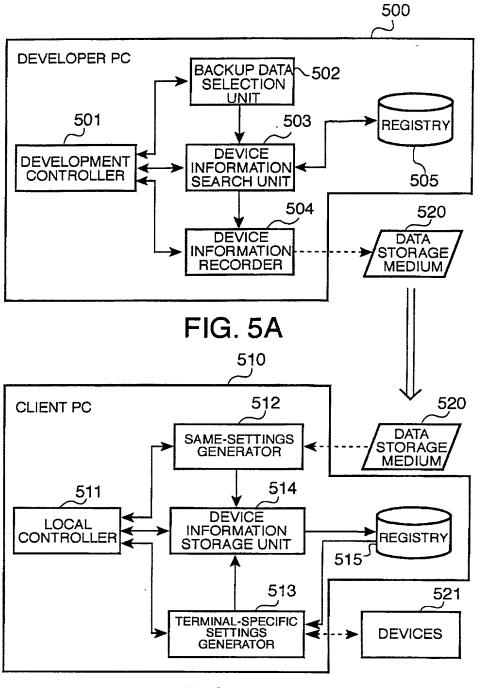


FIG. 5B

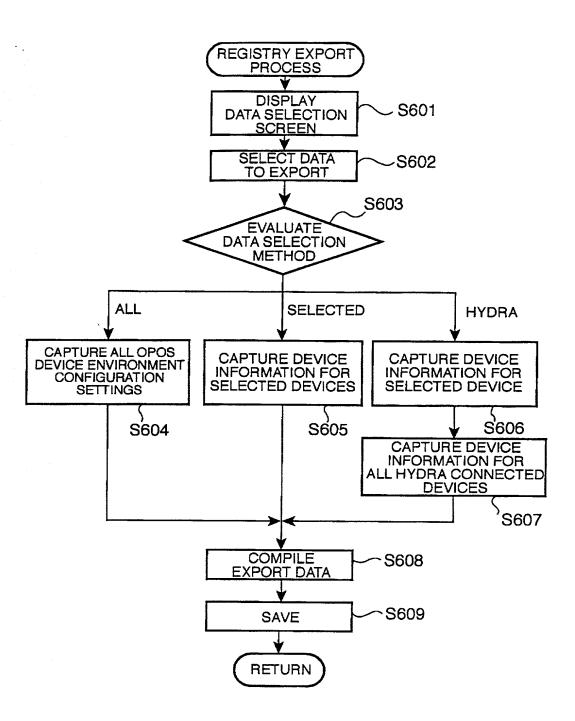


FIG. 6

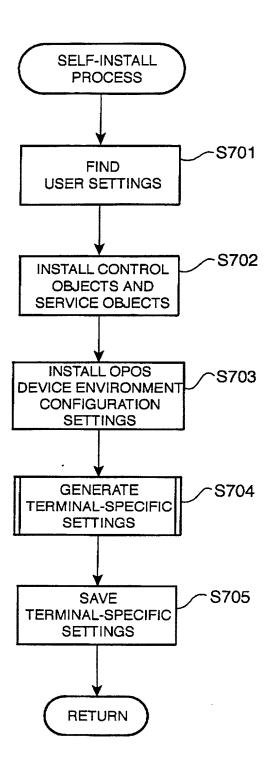


FIG. 7


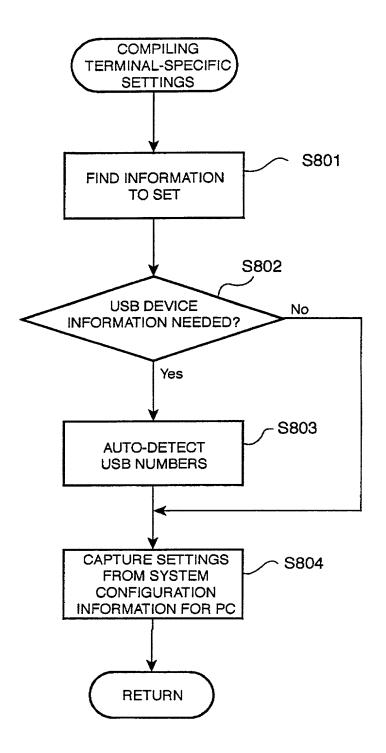


FIG. 8

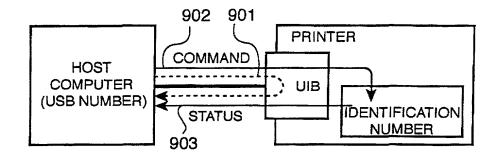

IDENTIFICATION NUMBER: PRODUCT ID, SUPPORTED LANGUAGES

FIG. 9A

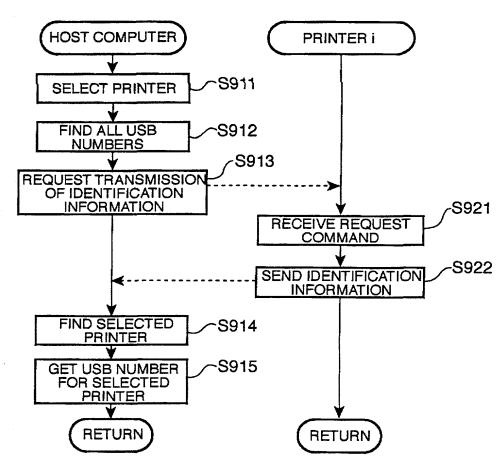


FIG. 9B

EXPORT REGISTRY	X
SAVE THE OPOS REGISTRY AS A REGISTRY DATA FILE	
TO EXPORT THE REGISTRY DATA FILE, CREATE AND INSERT	
BACKUP DISK "XXXXX OPOS ADK DISK-1" TO DRIVE A. USE	
THIS DISK TO REPLICATE THE SAME OPOS ENVIRONMENT	
ON MULTIPLE TARGET MACHINES.	
SAVE ALL: SAVES ALL INFORMATION SELECTED: SAVES INFORMATION ONLY FOR SELECTED OBJECTS HYDRA: SAVES INFORMATION FOR ALL HYDRA-CONNECTED DEVICES  SAVE ALL(A) SELECTED(S) HYDRA(Y) CANCEL HELP(	<u>H</u> )

FIG. 10

COMMUNICATION SETTINGS [
USB PORTSETTINGS-
USB1 ✓ DEVICES USING PORT:
SELECT AUTOMATICALLY NONE ▼
PARAMETERS — INPUT BUFFER LENGTH (I) ☐
BIT LENGTH(L) UTPUT BUFFER LENGTH(Q)
PARITY(Y)
HANDSHAKE(D)
PARENT DEVICE
NONE
INTERACTIVE CHECK (C) DEVICE SPECIFIC SETTINGS(S)
OK CANCEL HELP(H)

FIG. 11

